



Condor Technology Ltd.

DATASHEET: ELECTRICAL SMART HEATER FOR SPACE HEATING MODEL SMLP-(*A)



1 Application

Space-heaters for Hazardous locations. This compact model is designed for

- Anti-condensation
- Freeze protection
- Temperature maintenance
- Small spaces

2 Features and Advantages

- Self-limiting heating elements
- Small dimensions
- No moving parts, no maintenance required therefore long lifetime
- Suitable for T4 and T3 classifications
- Can be used for 110 / 240 VAC/DC also available in 24V for SMLP-4A

3 Description

All SMART Space-heaters are designed around self-limiting heating elements. These semiconductor elements are saving power consumption.

Our SMART Space-heaters are designed to heat the air inside an enclosure and indirectly the installed equipment. If properly selected for freeze protection, no thermostat will be needed

When required in other applications, e.g. analyzers, it is normal practice to use our Space-Heaters in combination with our Fix-Therm96 thermostats (range from 10 °C up to 135 °C).



Do not cover the fins to guarantee free convection.

4 Range

SMLP-1A	T3	ca. 115°C Surface temperature	100-10 Watt
SMLP-2A	T4	ca. 105°C Surface temperature	100-10 Watt
SMLP-3A	T4	ca. 90°C Surface temperature	100-10 Watt
SMLP-4A	T4	ca. 70°C Surface temperature	100-10 Watt

SMLP-4A is also available in 24V


High power model:

SMLP-0AHP	T3	ca. 130°C Surface temperature	200-20 Watt
-----------	----	-------------------------------	--------------------

* these temperatures are measured at 20°C ambient temperature.

5 Technical data

Power consumption	:	100-10 Watt or 200-20 Watt
Electrical cable	:	3 x 1 sqmm
Material cable	:	braided silicone, optional: non-braided cable
Standard length	:	ca. 1 mtr. Other lengths optional, on request
Weight	:	ca. 350 g.
Overall dimensions	:	100 x 54 x 54 mm (LxWxH)
Material	:	black anodized aluminium
EX protection class	:	II2G Ex d IIC T3 or T4 : II2D Ex tD A21 IP66 T 135°C or T200 °C
Certification	:	KEMA 01ATEX2124X and IECEx DEK 11.0017
Protect degree	:	IP 66
Voltage AC/DC	:	110/240
Ambient temp. range	:	- 60°C ... + 90°C

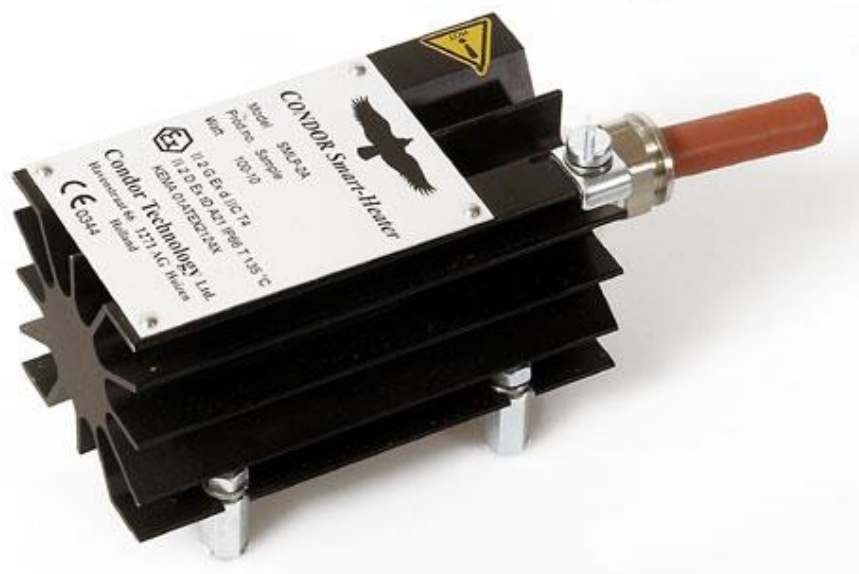

Copyright © Condor Technology Ltd. all rights reserved.



The information contained herein is believed to be reliable. Condor Technology Ltd. assumes no responsibility or liability whatsoever for any of the information contained herein.